


These alternator pole pieces are stored, elevated, oriented, dual tracked and loaded into the dies of two coining presses at 80 pieces per minute.

Air-oil operated die loading rams provide reliable action control.

Stock gons are bin rim supported for extra storage and ease of loading.

A bin level sensor calls for stock to avoid run-out delays.

Sound pressure is less than 84 decibels.

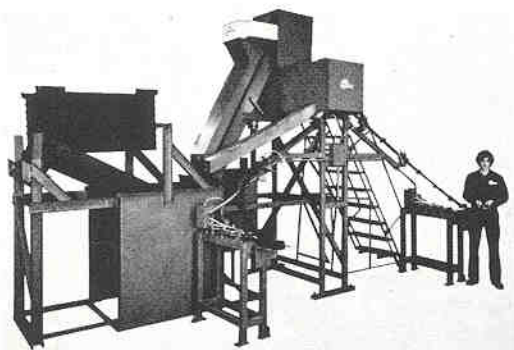

Do it all...

... with SPECTRUM's expertise.

Profit with integrated feeder packages.

Call, write or drop in for total parts feeding solutions.

