


Possibilities are endless

for damage caused by inefficient feed systems.

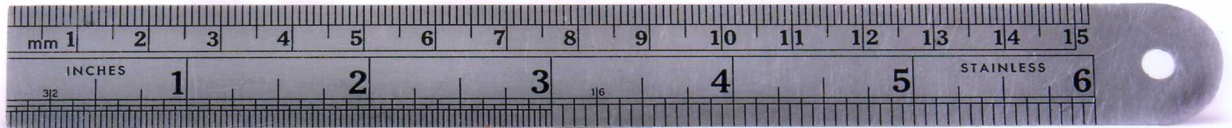

50 Calibre Projectiles are gently fed at 30+parts per minute for tracer treatment. A one cubic foot storage bin with an elevating conveyor gently delivers parts to straightline vibratory drives for orientation and live feed tracking.

Blunt end leading orientation tooling is nearly 100% but point end leading was required. So a mechanical reorientation device was used to keep orientor efficiency and gentle handling. Sound pressure 80 db(A) @ 3 feet was met without additional noise control features.



Call: (734) 522-2160 Fax: (734) 522-4671

E-mail: sales@spectrumautomation.com or drop in!

34447 Schoolcraft Road Livonia, MI. 48150

www.SpectrumAutomation.com