


HARD BUT FRAGILE...

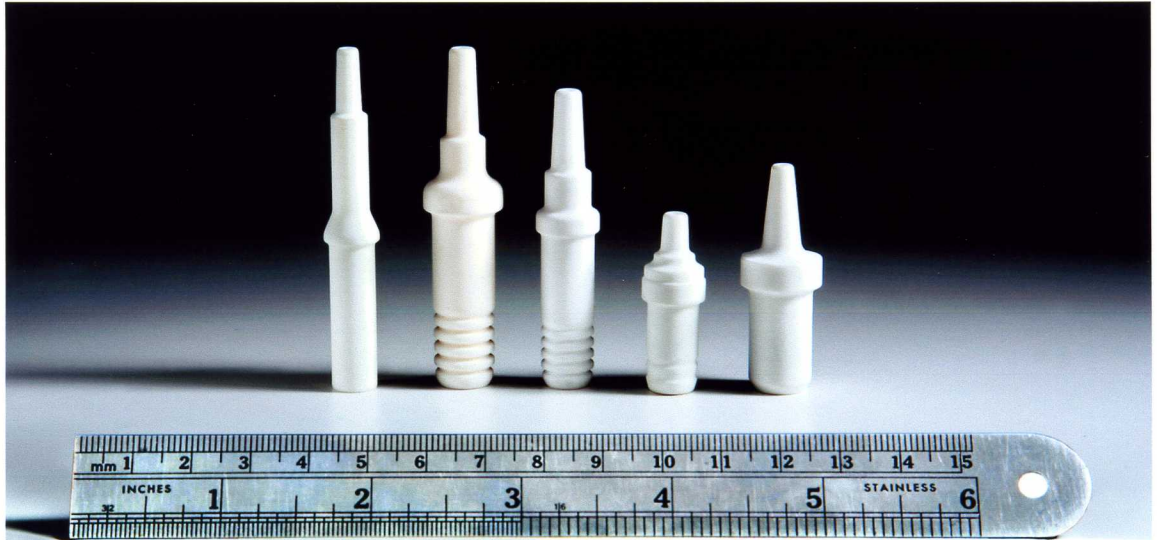

Prefired Spark Plug Insulators

NEARLY (80) DESIGNS (0.43 TO .62 INCH DIAMETER X 1.49 TO 2.92 INCHES LONG) are stored, elevated, oriented, tracked and escaped for glazing at (70) pieces per minute.

QUICK CHANGE TOOLING
is set in (20) minutes or less.

GENTLY HANDLED
to eliminate chipping.

NON-METALLIC PART CONTACT SURFACES
avoids marring the ceramic.



Call: (734) 522-2160 Fax: (734) 522-4671

E-mail: sales@spectrumautomation.com or drop in!

34447 Schoolcraft Road Livonia, MI. 48150

www.SpectrumAutomation.com