


Taper roller bearing outer races (cups) are fed, face selected, to process, inspection and final assembly operations by machines like this. Production rates, near 100 per minute, are met at less than 85 dBa noise level.

Wrong way parts cause severe damage and expensive downtime. Face selection must be 100.0000 percent. An orienter having 99.9999 percent reliability isn't good enough.

This Spectrum feeder has a guaranteed orienter that face selects 100.0000 percent.

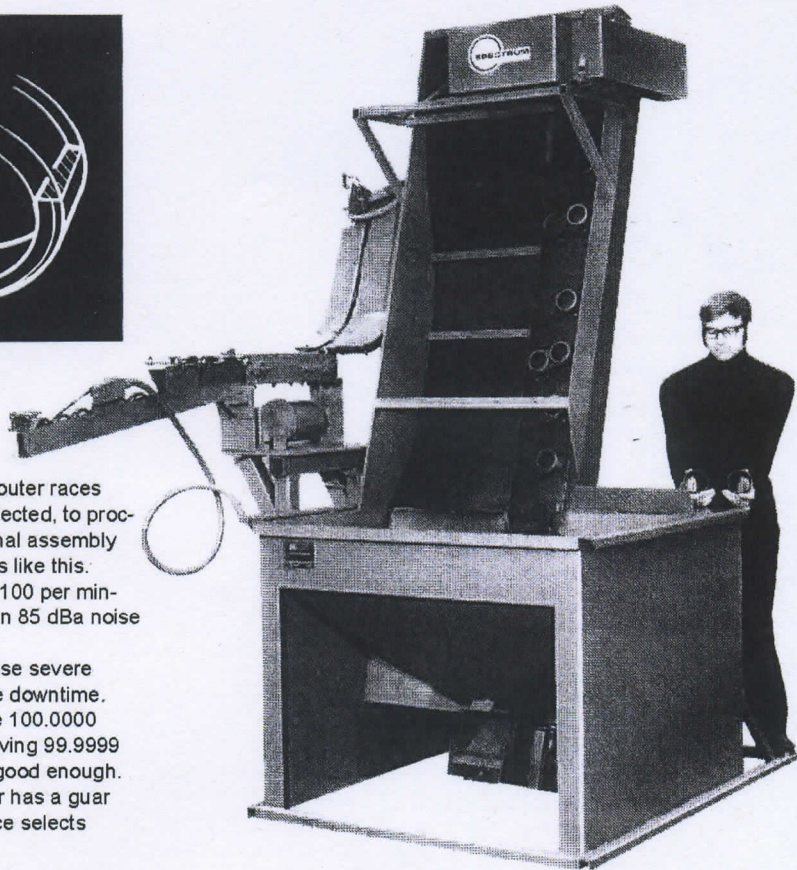

## The race...

...with costs and competition so fierce.

Let Spectrum put you up front.

Call, email or drop in for the best bet on that race.



Call: (734) 522-2160, Fax: (734) 522-4671

E-mail: [sales@spectrumautomation.com](mailto:sales@spectrumautomation.com)

34447 Schoolcraft, Livonia, MI 48150